



POWER MAGNETICS

PRODUCT OVERVIEW: SMT POWER BEAD INDUCTORS

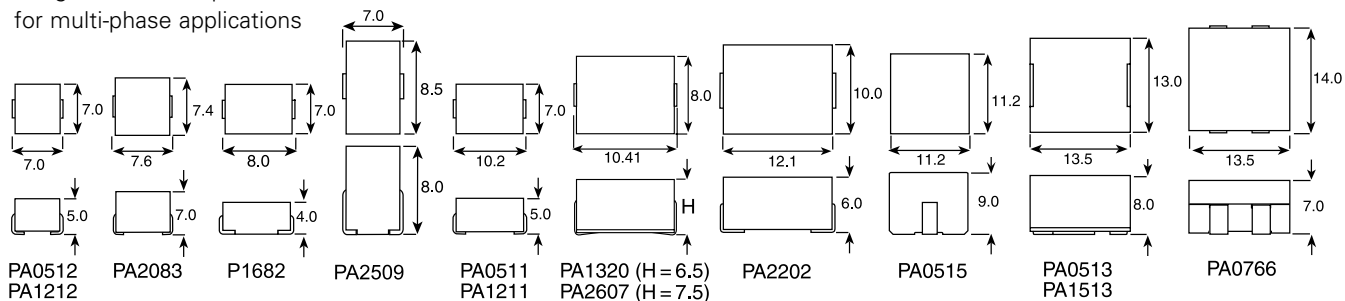

- Up to 70 A
- Typically for high current (>30 A) applications requiring inductance values below 0.5 μH
- VRM/VRD and DDR computing applications for server, work-station, portable and desktop
- Integrated and coupled inductors for multi-phase applications

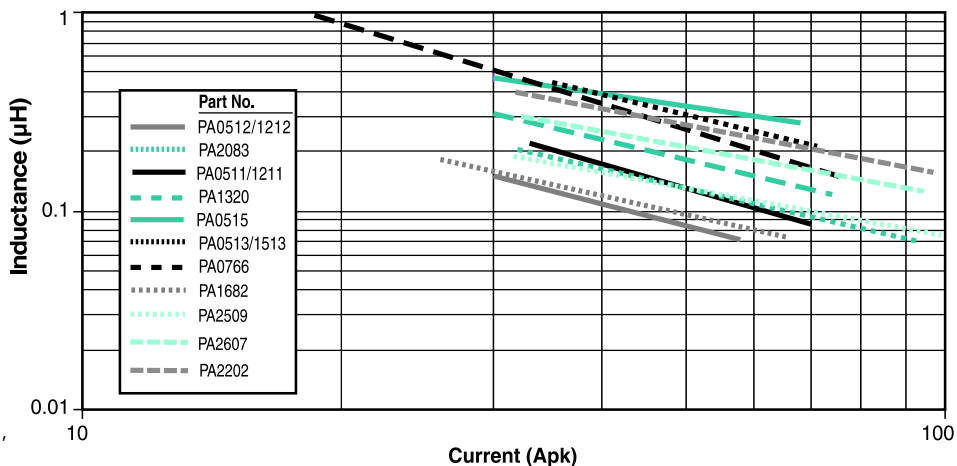

PRODUCT OVERVIEW: SMT FLAT COIL INDUCTORS



- Up to 38 A_{DC}
- Typically for mid- to high-current applications requiring inductance between 0.5 μH and 5.0 μH
- Portable computing, higher power DC/DC converters and Telecom applications
- Industry standard footprints

